



Electrical Characteristics:
 Current rating: 0.5A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C~+85°C
 Withstand Voltage: 500V AC/Minute
 Contact Resistance: $\leq 30m\Omega$
 Insulation resistance: $\geq 800M\Omega$

Material Description:

Contact: Phosphor Bronze Tin-plated
 Solder Tab: Phosphor Bronze Tin-plated
 Housing: Thermoplastic(UL94V-0)
 Slider: Thermoplastic(UL94V-0)

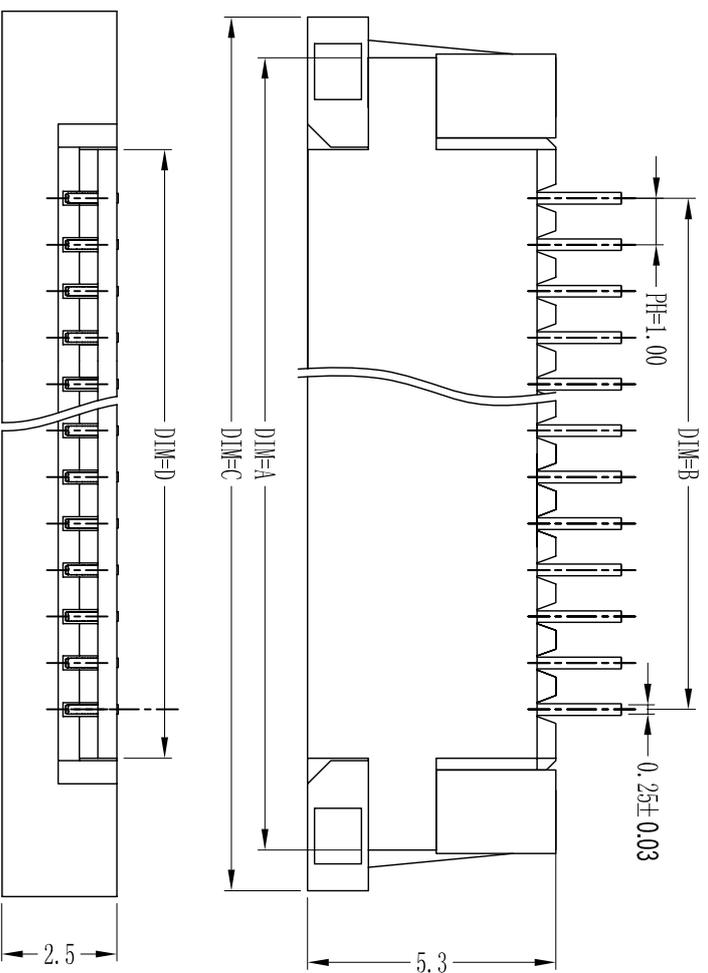

下接触

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
30P	35.1	29.00	37.0	31.10
29P	34.1	28.00	36.0	30.10
28P	33.1	27.00	35.0	29.10
27P	32.1	26.00	34.0	28.10
26P	31.1	25.00	33.0	27.10
25P	30.1	24.00	32.0	26.10
24P	29.1	23.00	31.0	25.10
23P	28.1	22.00	30.0	24.10
22P	27.1	21.00	29.0	23.10
21P	26.1	20.00	28.0	22.10
20P	25.1	19.00	27.0	21.10
19P	24.1	18.00	26.0	20.10
18P	23.1	17.00	25.0	19.10
17P	22.1	16.00	24.0	18.10
16P	21.1	15.00	23.0	17.10
15P	20.1	14.00	22.0	16.10
14P	19.1	13.00	21.0	15.10
13P	18.1	12.00	20.0	14.10
12P	17.1	11.00	19.0	13.10
11P	16.1	10.00	18.0	12.10
10P	15.1	9.00	17.0	11.10
9P	14.1	8.00	16.0	10.10
8P	13.1	7.00	15.0	9.10
7P	12.1	6.00	14.0	8.10
6P	11.1	5.00	13.0	7.10
5P	10.1	4.00	12.0	6.10
4P	9.1	3.00	11.0	5.10

深圳市三佐部品电子有限公司

- NOTES:**
 1. PLASTIC BURRS 0.1mm MAX
 2. PART NO. SPECIFICATION: AF2KXXB*SOT10
 PLASTIC SEMI-MANUFACTURED CODE
 NO. OF CONTACT BIBUTTON
- PACKAGE CODE SERIAL CODE
 CUSTOMER MARK MATERIAL CODE

SER AREA	REVISIONS	CHK	DATE	UNIT	SCALE	SIZE	NAME	REV
				MM	8:1	A3	FPC1.0K-一代下接成品图	A

UNLESS OTHERWISE SPECIFIED	APPROVED	DATE	PART NO.
TOLERANCES ARE			AF2KXXB*SOT10
± 0.20	CHECKED	DATE	DRAWING NO.
± 0.10	DRAWN	DATE	COMPUTER NO.
ANG.	黄孟奎	2009.09.07	
$\pm 0.30'$	NUMBER	SCALE	SIZE
		8:1	A3