


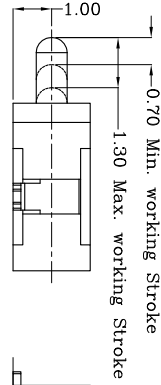
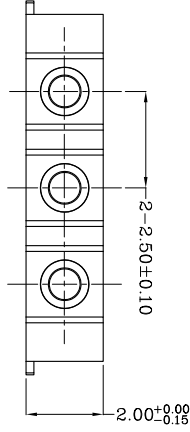
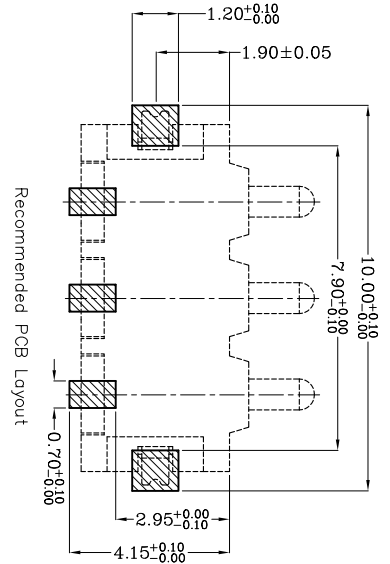



Proposal

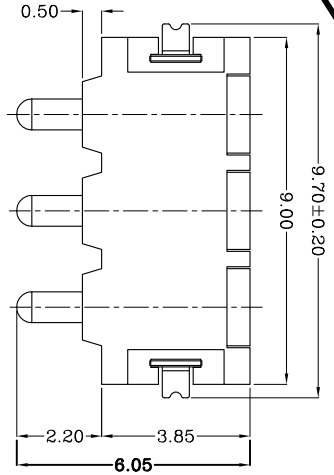

The Min.working Stroke	0.7mm	70gf min<2.1>
The Max.working Stroke	1.3mm	190gf max
Durability	10000cycle	

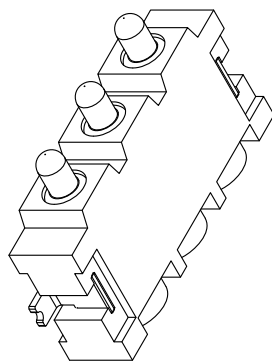

Item	Part name	Qty/Ed	Material	Finish
1	HSG	1	High Temp. Plastic UL94 V-0 Color Black	—
2	Body	3	Leaded Brass	Au plating over Ni plating
3	Plunger	3	Leaded Brass	Au plating over Ni plating
4	Spring	3	Stainless steel wire	—
5	Fork	2	Stainless steel wire	Sn plating over Ni plating

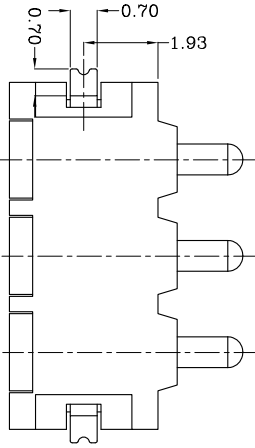

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M-1994.
 - 2 Mechanical performance(See the table 2)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
Resistance: 30mOhm Max.; Current: 2A DC
 - 4 Packaging Spec.
 - 5 RoHS compliant.

DIST
DIST
DIST

Rev.	Revision record.	Date.
	Renewal	2011/12/13
	NEW	2011/12/06

Top-Link
Electronics Ltd.
TOLERANCES UNLESS
OTHER SPECIFIED
0.0 = ± 0.15
0.00 = ± 0.10
0.000 = ± 0.05
Angle: ±1°
SURF. TEXTURE:
REMOVE BURRS.
BREAK SHARP EDGES
R0.05 MAX. DO NOT
SCALE PRINT.

Type	Unit	Weight
Customer drawing	mm	
DWN: APVD:		
CHK: QIN Zuozhong	REL:	
Name: Customer drawing		
Scale: 1:1	Size: A4	DWG No. C-100767
Page: 1/1	Rev. 4	

三佐株式会社

100767-3
PART NUMBER